



4D PTZ CONTROLLER



4D JOYSTICK AND HOTKEY

You can control the pan, tilt and zoom on the PTZ camera with ease. With the 46 buttons so operation is smooth for you to do it all in an instant!



SUPPORT RS-232, RS-422, NETWORK CONTROL INTERFACE

The options for connecting your CAVE camera are wide ranging. You can choose between network cable, rs-232 cable and RS-485 cable.



FLEXIBLE CAMERA CONTROL PROTOCOL

Support VISCA, VISCA over IP, PELCO-D, PELCO-P, ONVIF control protocol with CAVE Camera.



SUPPORT 7 CAMERAS

You can connect up to 7 PTZ cameras simultaneously with this controller.



10 PRESET AND INSTANT SWITCH

You can easy setup 10 preset positions and make them move around to any area you want.





POE POWERED / WEB SETUP PAGE

With built-in web-based setup page, you have the complete control easily.



Technical Specification:

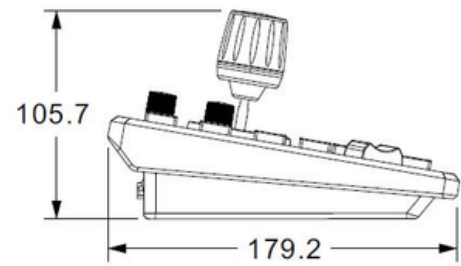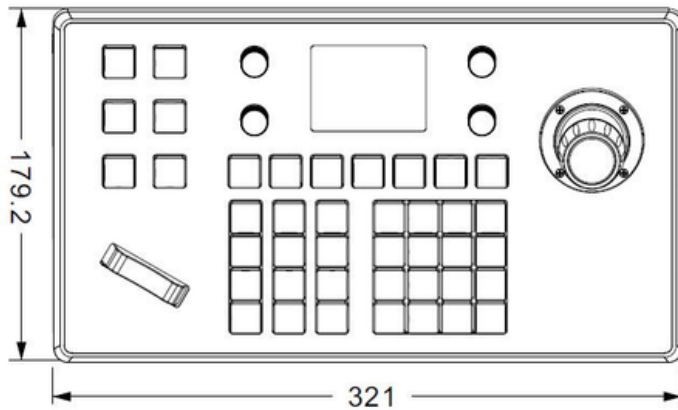

Model	K20
PTZ Camera Control	
PTZ Protocol	VISCA, VISCA Over IP, PELCO-D, PELCO-P, ONVIF
Joystick	4D Joystick
Button	47 buttons
LCD Display	TFT LCD 320*240
No. of control camera	7
System setup	OSD, Web Setup (IE, Chrome, Safari etc...)
Interface	
Network Interface	1x RJ-45 Ethernet (10M/100M)
Control Interface	RS-232, RS-422 Baudrate: 1200, 2400, 4800, 9600, 19200, 38400, 115200
USB Interface	USB 2.0 Type A (System upgrade)
Power Jack	DC IN 12V / 2A
General specification	
Input Voltage	DC 12V, POE
Power Consumption	5 W (Max)
Temperature Range	Operating: 0°C ~ 50°C Storage: -10°C ~ 60°C
Dimension (WxDxH)	321mm x 180mm x 106mm
Weight	1.63 Kg
Warranty	2-year (Limited Hardware)
Inside the box	
Package	Keyboard Controller, Power Adaptor, Quick Start Guide, Warranty Card

Specifications are subject to change without prior notice.

Copyright ©2021 CAVE-TEK. All rights reserved.